

Wireless Multimedia Presenter

User's Manual



Carefully read this user's manual before using
for the proper use of the wireless multimedia presenter

Save it for future reference.

Table of Contents

Introduction.....	2
I .Operation System.....	3
II .Parts Description.....	3
III.Installation.....	5
IV. Functions.....	5
V. Functions Table.....	6
VI. Operating Hints.....	10
VII. Battery Installation.....	10
VIII. Troubleshooting.....	12
IX. Technical Parameters.....	12
Safety Measures.....	14

Instruction

The wireless presenter is a great tool for PowerPoint presentations! With the presenter, you don't need to stand beside your computer or have another person click the computer to advance the slide!

The presenter works as a laser pointer, an optical mouse, a PC remote, a multimedia keyboard and a portable storage device.

The device comes with a transmitter and a USB receiver.

Advantages:

1. Easily control the pace of your presentation

Advanced radio frequency (RF) technology that works through walls with a controlling distance up to 10-meters/30-feet away, so you never have to stand at beside of your computer.

2. Multifunctional presenter

ICombines the functions of a laser pointer, an optical mouse and keyboard hotkeys etc.

3. Easy to use

It is USB plug-and-play. No driver required. Just plug the receiver into the USB port on a PC and it works within seconds.


4. Save power design

The device will go to sleep mode if there is no any operation for about 30 seconds. It will wake up if any key is pressed.

I .Operation System


Windows 98,Se,Me,2000,XP,Vista, Mac OS, Linux

II . Presenter and Receiver Diagram

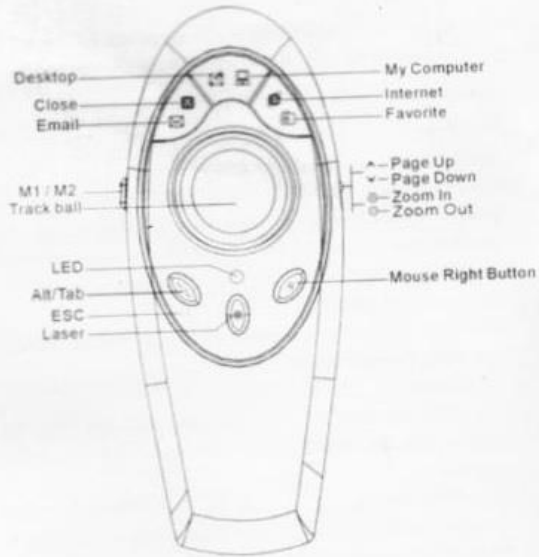


3


Transmitter side view



Transmitter back view



USB receiver



4

III. Installation

Plug the receiver into the USB port on your PC. The system will automatically detect it.

(Attention: you may need Win98 disk if your computer runs Win98/Se operation system.)

IV. Functions

- Laser pointer
- Trackball mouse
- Open Outlook Express /Close current window
- Go to desktop / Open My Computer
- Open Internet Explorer / Open Favorite
- Page Up / Zoom In
- Page Down / Zoom Out
- Alt+Tab / ESC


Remark for Alt+ Tab function:
To switch the window when open several windows.

5

V. Functions Table:





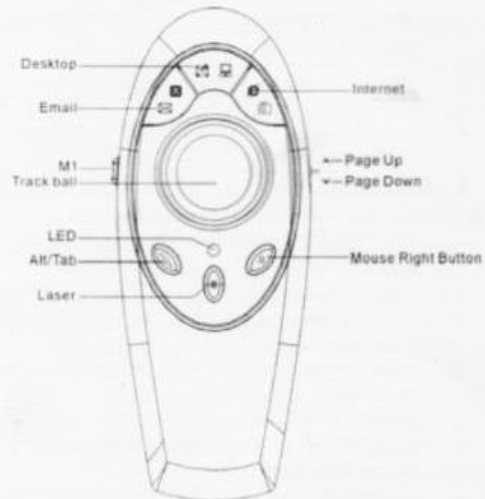

The presenter provides two working modes --- M1 & M2.
Switch button to change modes.

Mode: M1.




6







(The LED will be light when working)

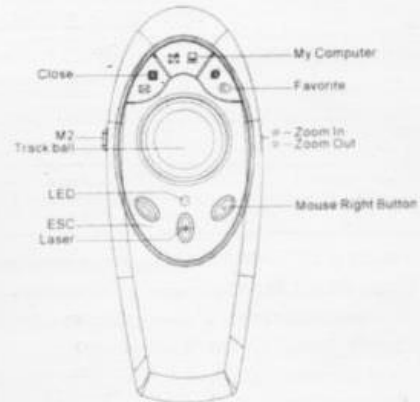





Key	Corresponding Function	Operating Condition
	Email	Any condition
	Desktop	Any condition
	Internet	Any condition
	Page Up	Any condition
	Page Down	Any condition
Alt / Tab	Alt + Tab	Any condition
	Laser	Any condition
R	Mouse Right Button	Any condition
Mouse Left Button	Mouse Left Button	Any condition

Mode: M2.









A) When switch to M1 mode. It functions as below:

- Email: Press "  "key to open Outlook Express.
- Desktop: Press "  " key to open desktop.
- Internet: Press "  "key to open Internet Explorer.
- Page Up: Press "  "key and it works as "PageUP" key on the keyboard.
- Page Down: Press "  " key and it works as "PageDown" key on the keyboard.
- Alt + Tab: Press "Alt / Tab" key to switch windows.
- Laser: Press "  " key to generate red laser light
- Mouse Right Button: Press "R" key
- Mouse Left Button: Press "Mouse Left Button" key
- Trackball: Works as an optical mouse

Key	Corresponding Function	Operating Condition
	Close	Any condition
	My Computer	Any condition
	Favorite	Any condition
	Zoom In	Windows Picture and Fax Viewer or ACDsee
	Zoom Out	Windows Picture and Fax Viewer or ACDsee
ESC	ESC	Any condition
	Laser	Any condition
R	Mouse Right Button	Any condition
Mouse Left Button	Mouse Left Button	Any condition

B) When switch to M2 mode. It functions as below:

- Close: Press " " key to close current window.
- My Computer: Press " " key to open My Computer.
- Favorite: Press " " key to open Favorite.
- Zoom In: Press " " key to increase the image size.
- Zoom Out: Press " " key to decrease the image size.
- ESC: Press "ESC" key and it works as "ESC" key on the keyboard.
- Laser: Press " " key to generate red laser light
- Mouse Right Button: Press "R" key
- Mouse Left Button: Press "Mouse Left Button" key
- Trackball; it works as an optical mouse.

(The LED will be light when working)

C) Built-in flash memory is optional
(No memory/128M/256M/512M/1G/2G)


VI. Operating Hints



- For optimal performance and RF reception, please place the receiver at least 15cm (6 inches) away from all electrical devices, such as your monitor, speakers or external storage devices.
- The product has been matched before ex-factory for convenient use. Each presenter has an exclusive code! Do not exchange the transmitter and receiver to other presenters! Please contact with the local dealer if mixed.
- Please use a USB extension cable, if the control distance of the Presenter works abnormally.

VII. Battery Installation

- The unit is powered by two (2) AAA batteries.
- Push and remove the battery cover located on the bottom of the device.
- Insert 2xAAA batteries into the battery holder and make sure that the Positive (+) and Negative (-) ends of each battery match the polarity indicators inside the battery housing.
- Push the battery cover back into position until it "clicks" firmly into place.

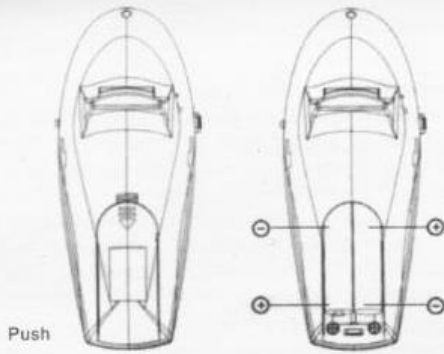

Note

1. Do not insert battery into the device in the wrong direction.
2. Do not leave bad or exhausted battery in the device.
3. Never combine an alkaline with a Ni-MH/Ni-CD battery in a device
4. If you do not use the device for a long period of time, remove the battery to avoid possible damage from battery corrosion.
5. If the device does not function correctly or if the operating range becomes reduced, try to replace the battery with new one.

VIII. Troubleshooting

What should I do if the presenter does not work?

- Make sure that the polarity of the batteries is correct. The Positive (+) and Negative (-) ends of each battery must match the Positive (+) and Negative (-) connections in the battery housing.
- Check to see if the receiver's USB connector is firmly attached to the USB port on your computer.

IX. Technical Parameters

Presenter

Interface	RF 2.4GHz
Control distance	Up to 10 meters
RF Power	Odbm
Trackball Resolution	Up to 400 DPI
Battery	AAAx2
Working voltage	3V
Power consumption	Working mode <100 mA Sleep mode <10 uA
Laser distance	Up to 200 meters
Wavelength	650nm
Max output	< 1mW(Class II) or <5mW(Class III) (optional)
Dimension	125 x 51 x 47 mm
Weight-without batteries	55g

Receiver

Interface	USB
Operation system	Windows 98/Se, Me, 2000, XP, Vista, Mac OS, Linux
Compatible plug	USB1.1, compatible USB2.0
Working voltage	USB electricity supply (4.5-5.5V)
Power consumption	<45 mA
Dimension	73 x 26 x 14 mm
Weight	16g

IMPORTANT SAFETY AND HEALTH INFORMATION



13

Safety Measures

- To avoid possible eye damage, never point the presenter at people, especially their faces, or look directly into the presenter's laser beam.
- Avoid pointing the presenter's laser beam at a mirror or other highly reflective surface.
- Keep the presenter away from children.
- Never view the presenter's laser beam using telescopic devices, such as a microscope or binoculars.
- Any attempt to disassemble, adjust or repair the presenter may result in exposure to laser light or other safety hazards.

RoHS
COMPLIANT



14